

## Features

- ▶ Typical wavelength, 658nm
- ▶ Stabilized optical power 20mW
- ▶ Single supply voltage, 5V DC
- ▶ **Circular beam**
- ▶ **Precisely adjustable focus beam size**
- ▶ **3 elements optic structure**  
(2 lens fixed, 1 lens mobile)
- ▶ **Modulation : digital, analog ~300KHz**
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : 3B (IEC 60825-1)
- ◆ **Option : Bracket & Power supply.**

## Specification

### Optical

Optical power(mW)	20 (Tc=25°C)
LD power(mW)	35 (Max)
Wavelength(nm)	658 ±7
Focus Beam Dia(mm)	Φ0.1 (at 300mm)
Collimated Beam Dia(mm)	Φ2.5(at 10m)
Collimated Beam Div(mrad)	<0.5
Beam Quality	TEM00, M <sup>2</sup> <1.5
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground

### Electrical

Operating voltage(DC V)	5 ± 5%
Operating current(mA)	100 (Typ.)
Drive circuit	APC
Operating Temp.(°C)	-10 ~ +60
Storage Temp.(°C)	-40 ~ +85

### Mechanical


Weight(g)	22 ± 0.5
Dimensions(mm)	14Φ X 72
Operating lifetime(h)	30,000~50,000 (@RT)
Housing material	Aluminum

## Description

The MR series laser diode module combines laser diode technology, 3 elements lens optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. Specially, This circular laser diode module emits circle laser ray from LD itself.

Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

## Drawings

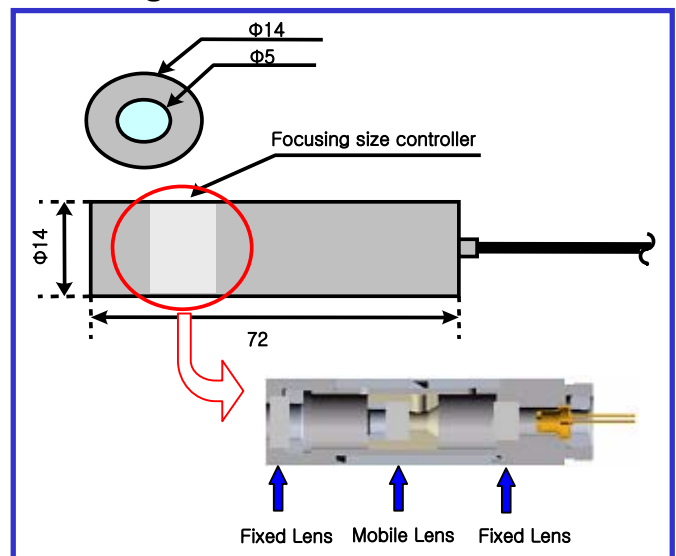

## \* Beam Profile

