

**Features**

- ▶ Typical wavelength, 855nm (Invisible)
- ▶ Stabilized optical power
- ▶ Attached deflection lens
- ▶ Single supply voltage, 5V DC
- ▶ Collimated or focused beam (adjustable)
- ▶ Low power consumption
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : 1 (IEC 60825-1:2007)

**Description**

The RS series laser diode module combines laser diode technology, quality optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. This series of modules provides a infrared(785nm) gaussian laser line. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

**Specification**

● **Optical (@RT)**

Items	Values	Unit
Optical output power	2.5±10%	mW
Peak wavelength	855±15	nm
Collimated beam dia. (@FWHM)	<1.5(@2M)	mm
Fan angle.	58	°
Line pattern	Accurate straight	
Beam intensity pattern	Gaussian	


● **Electrical (@RT)**

Items	Values	Unit
Operating voltage	5±5%	DC V
Operating current	25 (typ.)	mA
Drive circuit	APC	
Operating temp.	-10 ~ +50	°C
Storage Temp	-40 ~ +85	°C
LD Pin Connection	Case ground	

● **Mechanical**

Items	Values	Unit
Weight	8±1	g
Dimensions(mm)	Ø9*19	mm
Housing material	Brass	

**Drawings**

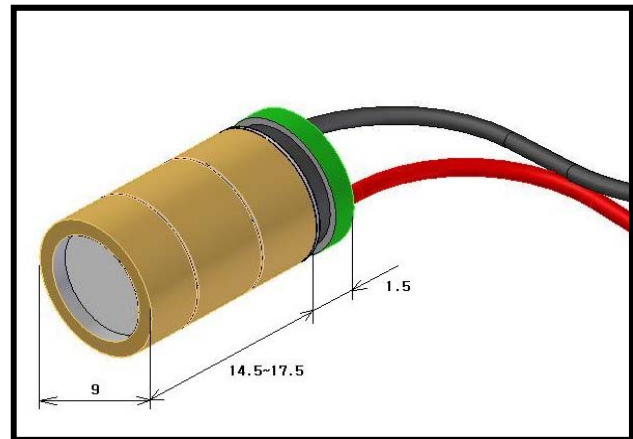

- ◆ **Warranty : One-year**
- ◆ **Accessory : Power adaptor**

**Lanics Co., Ltd.**  
Room #703, 7F Woolim e-Biz Center  
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea  
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260  
E-mail : support@lanics.com  
http:// www.lanics.com